




# HOSHIZAKI




## KM-320MAH-E / KM-515MAH-E CRESCENT ICE MAKERS

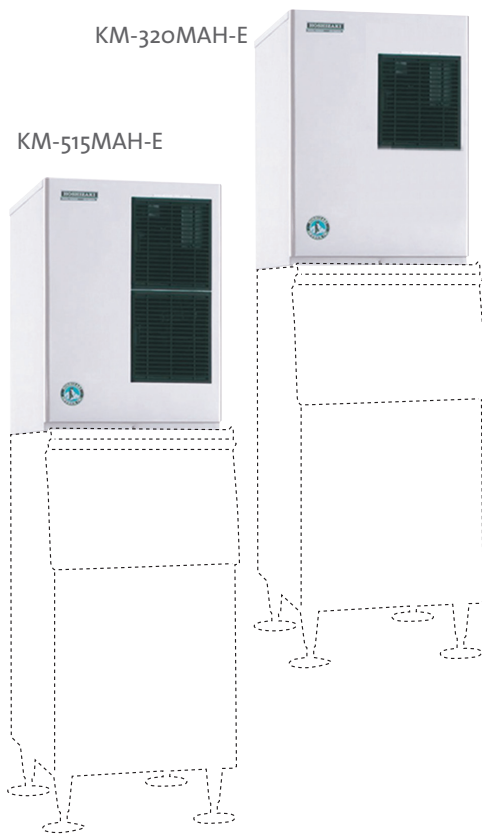


### Product Description

The KM-320MAH-E AND KM-515MAH-E are modular ice makers which produces clear, crescent shaped cubes.


- Versatile ice shape used in diverse applications such as splash-free serving of post mix soft drinks, fish transportation, display and even laser therapy
- Includes a double-sided stainless steel vertical evaporator, which requires fewer cycles to produce a full bin of ice, thereby reducing energy consumption.
- Cubes produced are crystal clear as only the purest water molecules will freeze on to the evaporator.
- Protected by H-Guard plus anti-microbial agent, which protects against bacterial, fungal, or microbial growth.
- CycleSaver® design allows KM machines to produce more ice, using less energy, while cycling 1/2 as many times as the competition.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- An easily cleanable air filter allows users to carry out a routine cleaning schedule themselves, extending the life expectancy of the ice maker.
- Mount two units side by side in only 1.2 sqm of floor space.

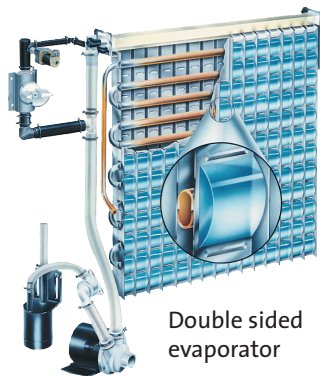

Double sided evaporator



Ice Type: Crescent  
Size: 30 x 37 x 13 mm



### Available Models

Model	Air Cooled	Water Cooled
KM-320MAH-E	•	
KM-515MAH-E	•	

### Bins

Model	Corresponding Bins
KM-320MAH-E - Modular Type	B-501SA, B-801SA
KM-515MAH-E - Modular Type	B-501SA, B-801SA

### Production

Model	Ice Production per 24h (Approx.)			Temperature	Ice Production per Cycle (Approx.)	Water Consumption per 24h (Approx.)		
	157kg	137kg	107kg			0.44m <sup>3</sup>	0.28m <sup>3</sup>	0.18m <sup>3</sup>
KM-320MAH-E	264kg	239kg	184kg	AT.10°C, WT.10°C AT.20°C, WT.15°C AT.30°C, WT.25°C	3.6kg / 360pcs	0.60m <sup>3</sup>	0.47m <sup>3</sup>	0.37m <sup>3</sup>

For more information visit our website  
[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)


Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.





# HOSHIZAKI

## KM-320MAH-E / KM-515MAH-E CRESCENT ICE MAKERS

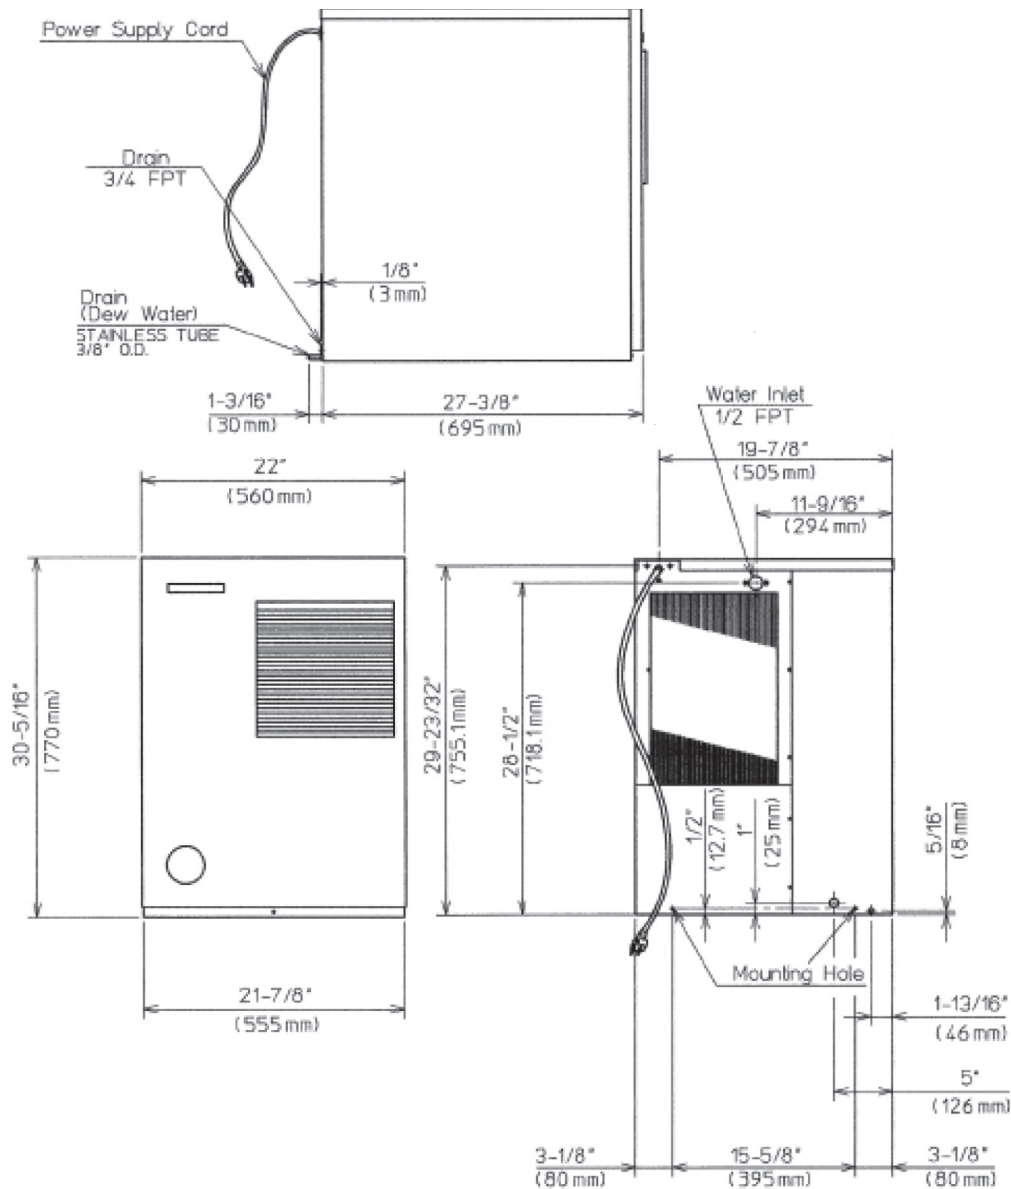

### Specifications

Full CAD specification drawings available on website

Specification	KM-320MAH-E	KM-515MAH-E
AC Supply Voltage	1 Phase 220 - 240V / 50Hz	
Electric Consumption (AT.32°C, WT.21°C)	710W	1200W
Insulation Foam Blowing Agent	Cyclopentane/CFC Free/ODP:0/GWP:3	
Heat Rejection (AT.32°C, WT.21°C)	1580W	3045W
Refrigerant Charge	R404A	R404A

Operation Requirements
Ambient Temperature: 7 - 38°C
Water Supply Temperature: 7 - 32°C
Water Supply Pressure: 0,7 - 7,8 bar (0,07 - 0,78MPa)
Voltage Range: 198 - 254V

For more information please contact your local sales office:

Hoshizaki Belgium:  
Hoshizaki Deutschland:  
Hoshizaki France:  
Hoshizaki Iberia:  
Hoshizaki Middle East:

info@hoshizaki.be  
info@hoshizaki.de  
info@hoshizaki.fr  
info@hoshizaki.es  
info@hoshizaki.ae

Hoshizaki Nederland:  
Hoshizaki United Kingdom:  
Other countries:

sales@hoshizaki.nl  
uksales@hoshizaki.co.uk  
sales@hoshizaki.nl

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)